


# UNIVERSAL ISU690

Product Data Sheet

## 2-way component kit

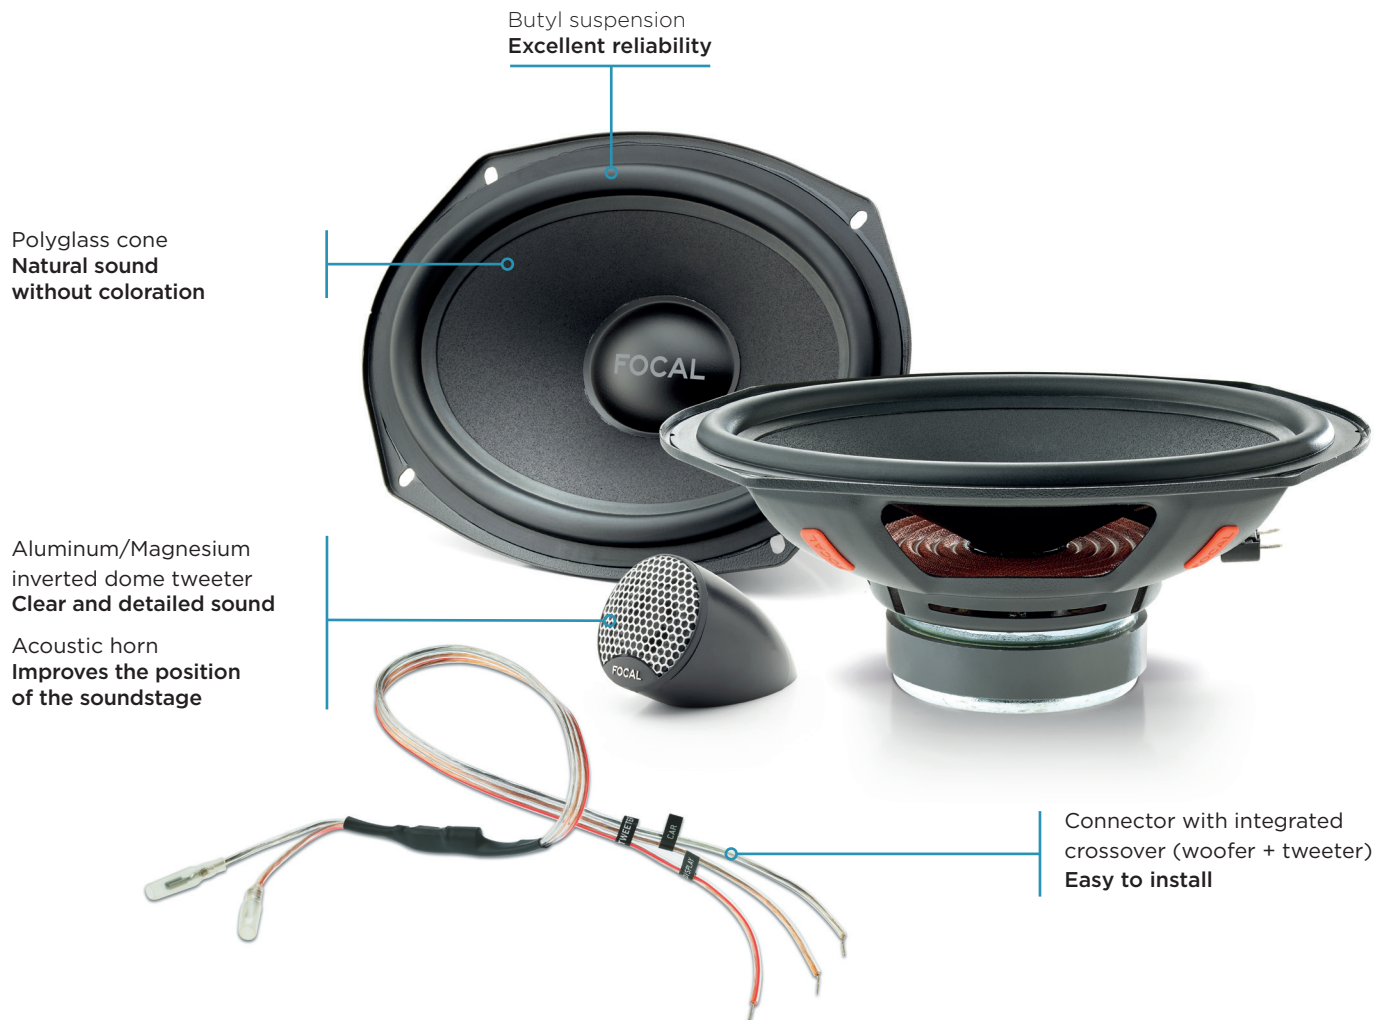

### ADVANTAGES


- High sensitivity
- Shallow mounting depth (3<sup>9</sup>/<sub>32</sub>" - 83.5mm)
- Dynamics and neutrality
- 2 types of tweeter mounts
- Compact tweeter



Detachable tweeter



Tilted mounting frame:  
Easy to install



Mounting options:  
car and display

## TECHNICAL CHARACTERISTICS

**Woofer:** 6"x9" (164x235mm)  
**Voice coil diameter:** 1" (25mm)  
**Max. power:** 160W  
**Nom. power:** 80W RMS

**Sensitivity (2.83V/1m):** 93.6dB  
**Frequency response:** 55Hz-21kHz  
**Al/Mg inverted dome tweeter**  
**Accessories:** delivered without grilles

**Integrated crossover:** 6dB/oct

**Integration**  
INSTANT GRATIFICATION

Focal is a trademark of Focal-JMLab - Tél. (33) 04 77 43 57 00 - www.focal.com - Images may not conform exactly to specific product.  
Photos L'Atelier Sylvain Madelon-SCAA-170908/3

**FOCAL**  
LISTEN BEYOND